


Hector Clip Light

Instruction Manual



Medium Dome
US-FL344

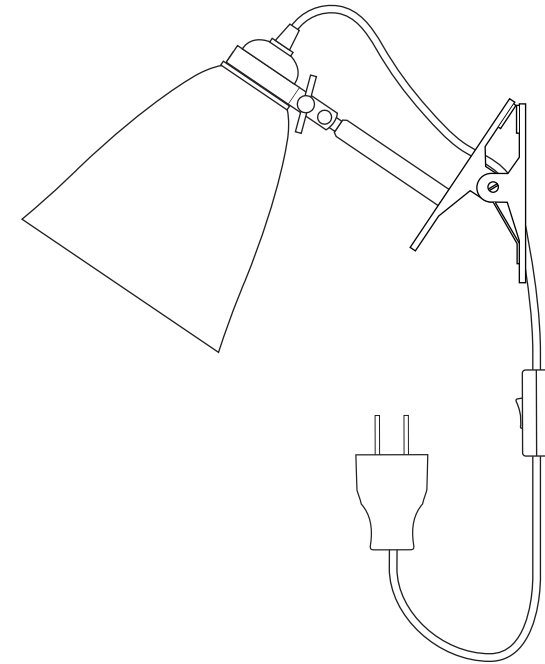


Small Dome
US-FL281



Circle Line
US-FL344CL



Metal
US-FL344LP











Established in 1990, Original BTC manufactures relaxed, familiar lighting for traditional and contemporary homes.
All products are hand-assembled in Oxford from high quality components, produced in the UK.

Hector Clip Light

| 120V ac 60Hz | IP20

US-FL344	Hector Medium Dome	US-FL344CL	Circle Line
US-FL281	Hector Small Dome	US-FL344LP	Metal, Polished Aluminium

A British design classic in translucent bone china. With its moveable shade and smart cotton braided flex, the Hector table light marries style and function. The range includes a selection of simple bone china pendants, wall lights and floor lights, with several shade varieties.


LAMP GUIDANCE Hector Small			
BASE	SHAPE*	TYPE**	WATTAGE***
 E12	 CANDLE	 BALL	 R50
		INCANDESCENT (R50 only) ✓	40W
		CFL ✓	9W
		ECO-HALOGEN ✗	n/a
		LED ✓	7W
<p>* Use low energy CFL or LED candle/ball lamp for a combination of ambient and low level task lighting or R50 lamp if high level task illumination required.</p> <p>** Warm white (2700k) low energy lamps recommended.</p> <p>*** Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used.</p>			
LAMP GUIDANCE Hector Medium, Circle Line, Hector Metal			
BASE	SHAPE	TYPE*	WATTAGE**
 E26	 A	 CIRCLE LINE	 HECTOR METAL
		INCANDESCENT ✓	40W MAX
		CFL ✓	11W
		ECO-HALOGEN ✗	n/a
		LED ✓	7W
<p>* Warm white (2700k) low energy lamps recommended.</p> <p>** Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used.</p>			

Safety Instructions

ENG WARNING – RISK OF FIRE AND ELECTRIC SHOCK.
SUITABLE FOR DRY LOCATIONS ONLY
FR ATTENTION – RISQUE D’INCENDIE, RISQUE DE CHOC.
POUR EMPLACEMENTS SECS SEULEMENT

- When fitting is in operation, some parts will become hot; take care when using/handling.
- Ensure the lamp type and max wattage is followed- do not exceed. Do not overtighten lamp (bulb).
- Do not touch the lamp or lamp holder while in operation, as both become very hot.
- Turn off & unplug fitting, leaving lamp to cool before changing lamp. Dispose of old lamps carefully.
- Adjust light fitting only when power to the fitting is off and has been left to cool.
- Never leave a fitting without a lamp in position (or someone can touch the contacts).
- Keep light fitting away from combustible materials such as soft furnishings.
- Ensure children do not play with the light fitting. Trailing flex can present a strangulation hazard to children. We recommend installing the light with a suitable cord clip, available at good DIY stores.
- If the electrical flex or electrical components become damaged at any point, the fitting must be unplugged from the power supply immediately and not operated until the damaged parts are fixed/replaced.
- For use in a dry, indoor environment only. Ensure the fitting does not come into contact with any liquids.


Clip Positioning

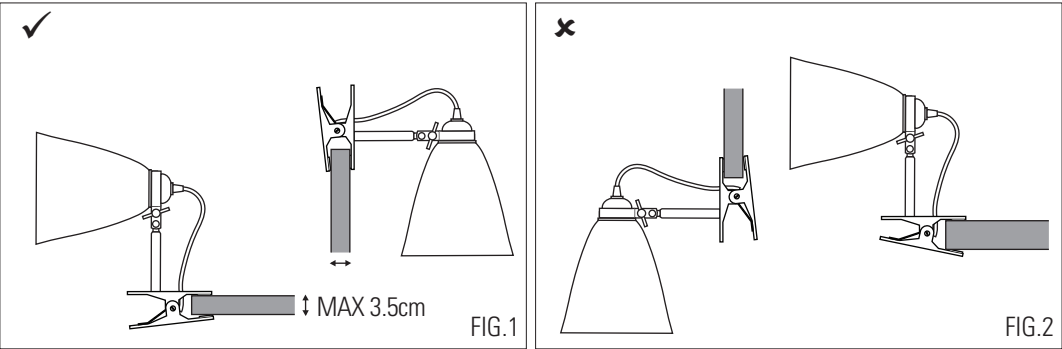

- The clip allows for attachment to be made on a range of surfaces, but its recommended that the mounting surface does not exceed 3.5cm in thickness and clip is positioned on a horizontal surface (eg. shelf), or on top of a vertical surface (eg. headboard)- see Fig.1.
- Mounting surface should be square/flat; always ensure a secure attachment is made before operating. It is not advised to position on the bottom of a vertical surface or on a surface thicker than 3.5cm- see Fig.2.

Adjusting Shade

- 1 Clamp ring
- 2 Clamp handle
- 3 Stem

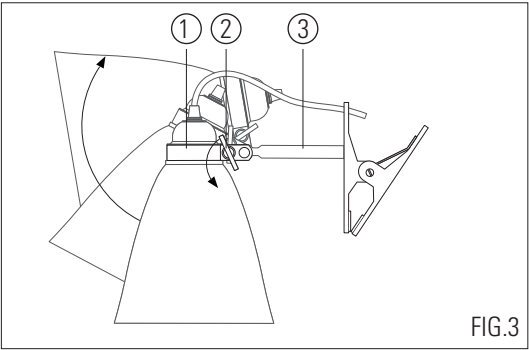

- See Fig.3. With one hand supporting the shade, gently loosen the clamp handle (3). One quarter-turn, in an anti-clockwise direction should be sufficient.
- The shade can then be moved into desired position, ensuring the clamp remains attached to the stem, but without applying excessive force to the washers on the inside of the clamp. Ensure the shade is still supported whilst adjusting position.
- Secure in place by gently tightening clamp handle, **taking care NOT to overtighten**, as this can damage the clamp.
- Do not adjust the position of the shade without loosening the clamp first, as this will damage the washers.

Cleaning and Maintenance

Metal finishes should only be cleaned with a soft, dry cloth. Do not use polishes or abrasives. Bone china can be cleaned using a soft damp cloth with a mild detergent if necessary. Switch off power to the fitting before cleaning. Spare parts are available for this product, please see contact details on the reverse.