

# BERT FRANK

## LIZAK PENDANT LIGHT (SUPPORT CABLES)

### MAINTENANCE

- Lacquered brass and glass should be wiped with a soft dry duster.


### TECHNICAL

- 2 x G9 LED bulb
- 2 x E27 LED bulb (UK/EU) LED filament
- or 2 x E26 LED bulb (USA) LED filament
- (squirrel caged shape recommended)


www.bertfrank.co.uk  
+44 (0)207 164 6482

### INSTALLATION


- 1
- Decide on position of the ceiling plate.
  - Feed mains electrical feed through the hole in the mounting plate and then secure to ceiling using 4 suitable screws.

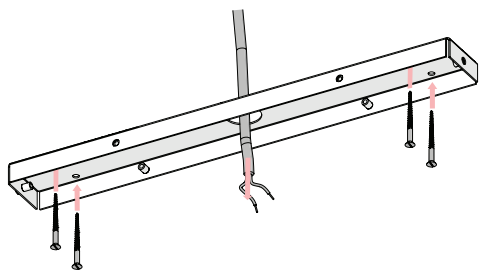


- 2
- With the main pendant safely on a flat surface start the process of attaching the glass shades.
  - For the main glass shade, firstly separate the shade fixing plates by unscrewing the 4 screws and removing the first ring.
  - Repeat on the other end of the pendant.

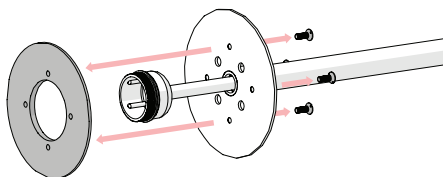


- 3
- Now gently bring the end of the main glass shade to meet the shade fixing plate.
  - Then through the other end bring the fixing ring to meet the other inside of the main glass shade.
  - Screw the 4 screws back in, sandwiching the main glass shade securely in place between the plates.
  - Repeat with the other main glass shade.

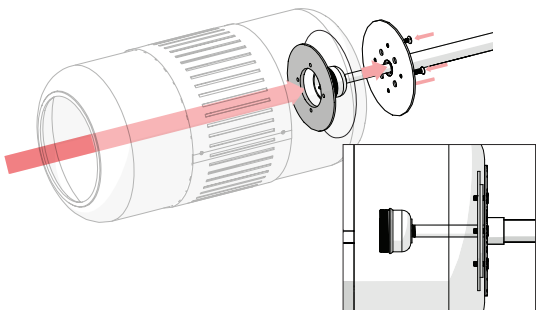


- 4
- Decide on desired drop height.
  - Take the end of the steel wire and feed down the barrel attached to the top of the pendant. It will feed out the side hole. The barrel will grip the wire.
  - To loosen press the button on the top of the barrel - it will release the grip on the wire.
  - Repeat with the 2nd wire.




- 5
- Take the other end of the steel wire and feed down the barrel attached to the ceiling plate.
  - Feed it through and out the hole until the desired drop height is reached. Repeat with 2nd wire.
  - Once all is balanced and correct, cut off the excess wire coming out from the side holes.



- 6
- Feed the electrical flex from the pendant up into side hole of the connection barrel and into the ceiling plate.




- 7** - Make electrical connection.  
- Connector block not supplied but ensure a suitable type is used.




!!! Ensure this is done by a qualified electrician. !!!

## BULB REPLACEMENT


- 1** - Turn off the light at the mains.  
- For the 2 x main glass shades, insert E27/E26 bulbs by screwing them into the lamp holder.

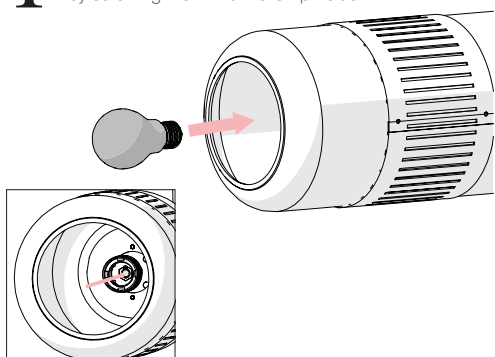


- 3** - Insert G9 bulbs by pushing them into lamp holder.




- 8** - Supporting the light, fix the covering plates to the ceiling plates using the screws provided.

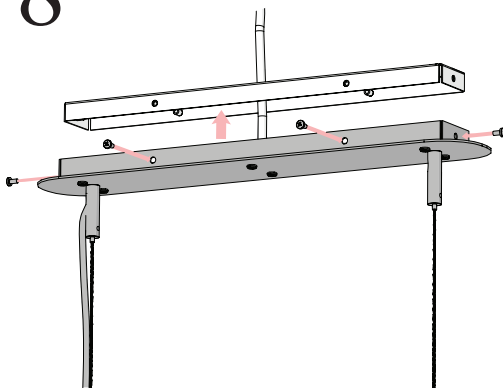

- 2** - For the globe glass shades holding the glass globe in one hand pull it away from the stem of the lamp until it is released from the spring clips.  
- Keep fingers away from the shade collar.

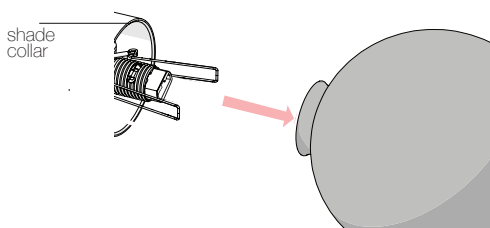

- 4** - Pinch the two ends of the spring clips together.  
- Slide them back into the neck of the glass globe.  
- The globe should fit back into the collar. Be careful not to catch your fingers.

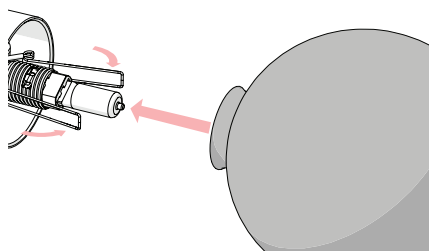

This product is only suitable for connection to the native power supply to which the unit was specifically manufactured. It is for indoor use only, and not suitable for a bathroom location.

Never fit bulbs of a higher wattage than those specified on the label, as these may cause overheating and damage the fitting.

If the mains cable becomes damaged it must only be replaced by a technically competent, qualified person.

Allow 10 minutes to cool before replacing, adjusting or cleaning. Clean with a dry cloth only. Do not use liquid or abrasive cleaners on this product.

If you are in any doubt about your competence please consult a qualified electrician.

If any modification is made it will invalidate the warranty and may render the product unsafe.