GEISHA LANTERN - OUTDOOR

Installation Instructions



IMPORTANT SAFETY INSTRUCTIONS

When installing or using lamps and /or other lightings accessories,basic safety precautions must be followed,including the following:

- Read all instructions before attempting any part of the installation. If you do not understand the instructions, do not attempt any installation. Save these instructions.
- 2. Install and mount lamps only on structurally sound surfaces.
- Do not install any lamps closer than 6" from any curtains, exotic veneer or similar combustible materials.
- 4. To reduce the risk of the fire,electric shock and potential damage to the lamps,do not attempt to connect motors,power tools,extension cords, appliances,and the like on the branch circuit serving the lamps.
- Disconnect electrical power circuit before adding to or changing the configuration of the lamps.
- 6. A certified electrician should install this product to avoid any untoward incident.

CARE AND MAINTENANCE

- GEISHA shades should be regularly dusted using a soft bristled brush.
- Work in sections from the top to the bottom of the shade, use long sweeping movements to remove the dust..
- Do not to brush too vigorously to avoid snagging and damaging the weaving.
- Never use water to clean the outer surface of a paper shade.
- If the geisha product has a paper shade use a soft cloth to wipe the inner surface of the shade.

Parts Included:


- -1 pc. GEISHA Lantern (outdoor)
- -1 pc. Cable Hanger Stainless Steel

NOTE:


- *Observe extra caution in handling and moving the lamp.
- *Lamp may require two or more persons to mount and assemble.

Steps in Installation:


1.1 Take out the item from the box & remove the ehwa foam.

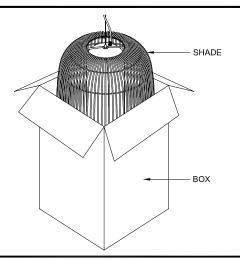


- 2.1 Cut stainless steel cable wire to desired length.
- 2.2 Thread holes with s/s cable as shown.
- 2.3 Adjust length of royal cord and loop to cable hanger as shown.
- 2.4 Hang assy to ceiling with hook.
- 2.5 Connect royal cord to existing circuit.

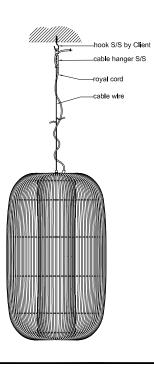

BLOW-UP DETAIL

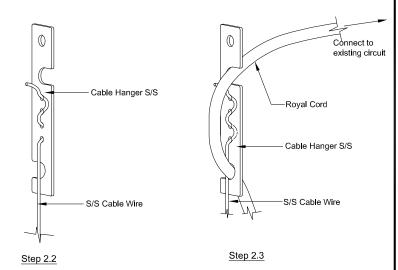

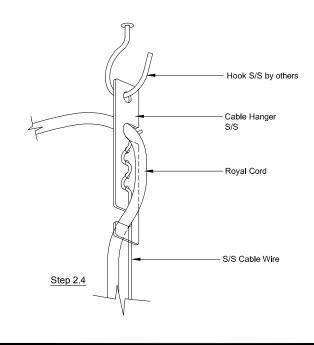

I NOTE:

UL Connection = white wire to neutral / black wire to live CE Connection = blue wire to neutral / brown wire to live