
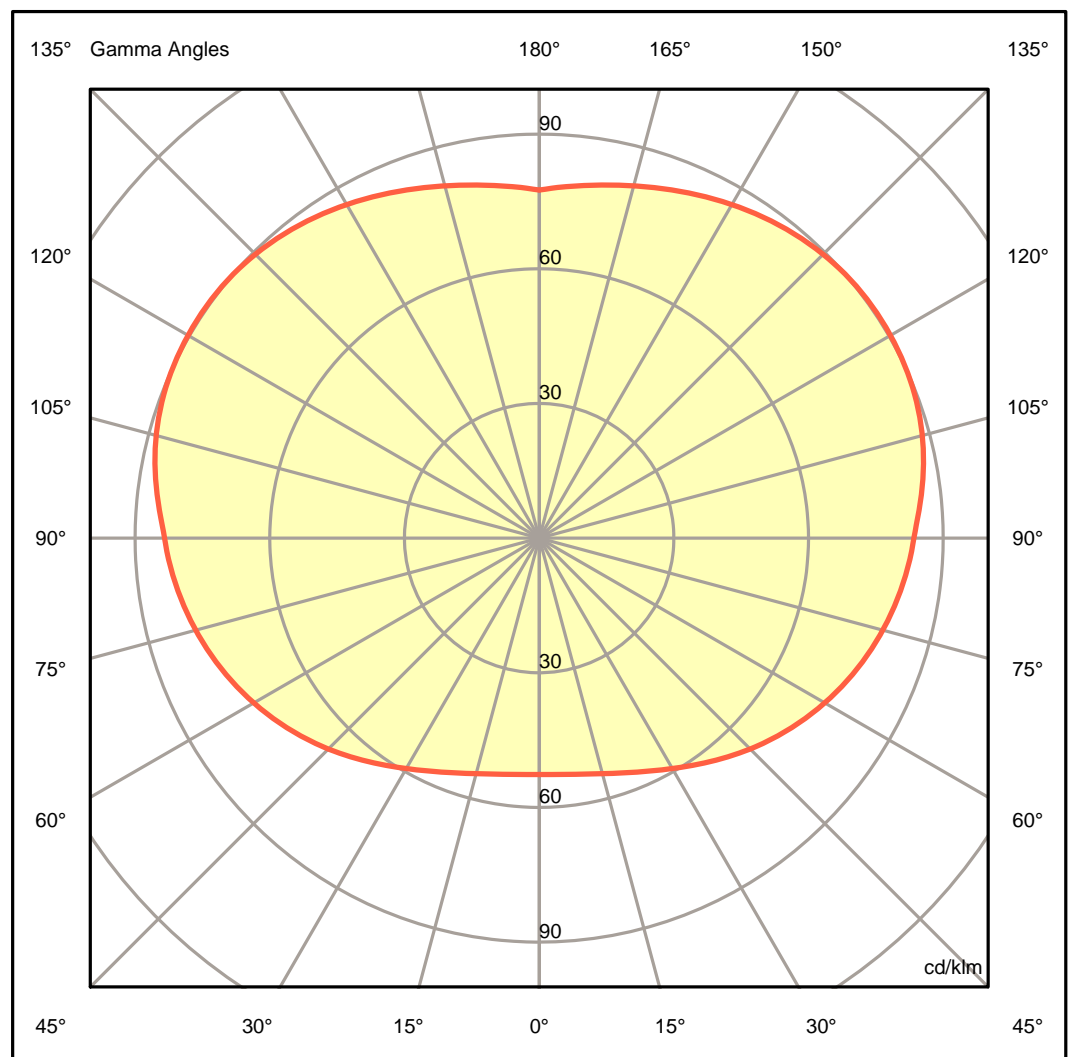


Code	0003FT20-C
Name	KUSHI 33 CEILING LED

Luminaire Sources							Flux [lm]	Pow. [W]	Q.ty
Line	Board LED SMD - 23W - Nominal Lumen 1980 lm - 2700K - CRI80						1693.00	22.60	1
C.I.E.	21	45	72	45	100	D DIN 5040	C12		
F UTE	0.45	J	+	0.55	T	B NBN	BZ 9		



Luminaire

Code	KUSHI 33 CEILING LED
Name	KUSHI 33 CEILING LED

Measur.

Code	0003FT20-C
Name	KUSHI 33 CEILING LED

Luminaire Flux	1693.00 lm	Luminaire Power	22.60 W	Efficacy	74.91 lm/W	Efficiency	100.00%
Sources Flux	1693.00 lm	Maximum value	90.40 cd/klm	Position	C=0.00 G=123.00	CG	Rotosymmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Working Plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room Dimensions	Lateral View					Viewed Endwise				
x=2H y=2H	10.1	11.0	11.0	12.0	13.2	10.1	11.0	11.0	12.0	13.2
x=2H y=3H	13.1	13.9	14.0	14.9	16.1	13.1	13.9	14.0	14.9	16.1
x=2H y=4H	14.7	15.4	15.6	16.4	17.7	14.7	15.4	15.6	16.4	17.7
x=2H y=6H	16.3	17.0	17.3	18.0	19.3	16.3	17.0	17.3	18.0	19.3
x=2H y=8H	17.1	17.8	18.1	18.8	20.1	17.1	17.8	18.1	18.8	20.1
x=2H y=12H	17.9	18.5	18.9	19.5	20.9	17.9	18.5	18.9	19.5	20.9
x=4H y=2H	10.2	10.9	11.1	11.9	13.2	10.2	10.9	11.1	11.9	13.2
x=4H y=3H	13.3	13.9	14.3	14.9	16.3	13.3	13.9	14.3	14.9	16.3
x=4H y=4H	15.0	15.6	16.0	16.6	18.0	15.0	15.6	16.0	16.6	18.0
x=4H y=6H	16.9	17.4	17.9	18.4	19.8	16.9	17.4	17.9	18.4	19.8
x=4H y=8H	17.8	18.3	18.8	19.4	20.7	17.8	18.3	18.8	19.4	20.7
x=4H y=12H	18.8	19.2	19.8	20.3	21.7	18.8	19.2	19.8	20.3	21.7
x=8H y=4H	16.0	16.5	17.0	17.5	18.9	16.0	16.5	17.0	17.5	18.9
x=8H y=6H	17.5	18.0	18.6	19.0	20.4	17.5	18.0	18.6	19.0	20.4
x=8H y=8H	18.5	18.9	19.6	20.0	21.4	18.5	18.9	19.6	20.0	21.4
x=8H y=12H	19.6	19.9	20.7	21.0	22.4	19.6	19.9	20.7	21.0	22.4
x=12H y=4H	15.9	16.4	16.9	17.4	18.8	15.9	16.4	16.9	17.4	18.8
x=12H y=6H	17.5	17.9	18.6	19.0	20.4	17.5	17.9	18.6	19.0	20.4
x=12H y=8H	18.5	18.9	19.6	19.9	21.4	18.5	18.9	19.6	19.9	21.4

