



Etat-des-Lieux 2C


Assembly instructions



Attention: Read and understand these instructions before installing fixture. This fixture is intended for installation in accordance with National Electric Code and local regulation : to assure full compliance with local code and regulations, check with your local electric inspector before installation. This equipment is guaranteed only when used as indicated in the instructions; therefore they should be kept for future reference. Install where luminaire will be protected from likely damage. This fixture is ceiling mounted only.

Your box should contain

1x Canopy feed box 90 deg



4x Support box



2x Flat cable section




2x Glass module with Flat cable.



Tools needed, not included


- 2x 8-32 screws for junction box
- 5x wire connectors for junction box
- Screwdriver phillips and flat

1 Measure, mark and drill appropriate hole distance to mount backplate of canopy feed and canopy to ceiling. Install anchors if needed (not included)

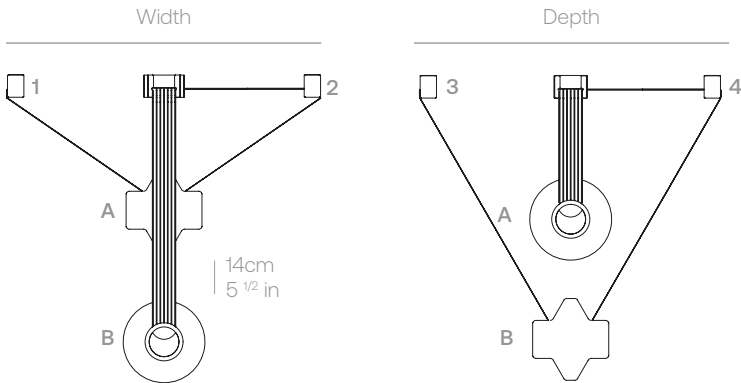


Model	Code	Length	Width	Depth
	B	89cm (35in)	64.3cm (25.3in)	29.7cm (11.7in)
2C	C	112cm (44in)	83.3cm (32.8in)	48.3cm (19in)
	D	201cm (79in)	157cm (61.8in)	122cm (48in)

*The dimensions are calculated with an angle of 45 deg of strap.

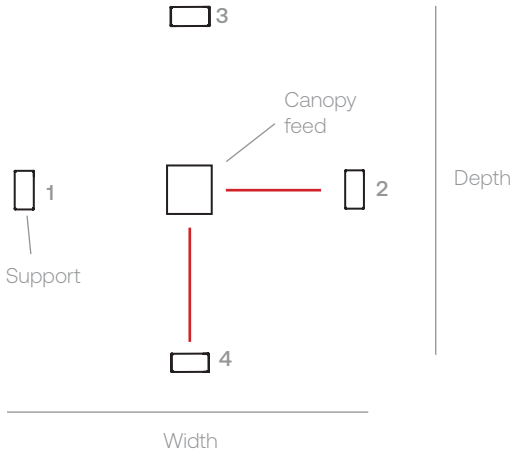


2 Make appropriate connexions with wire bundle provided to ceiling wiring. (Shut off main power at the circuit breaker panel)


Ceiling wires	Fixture wires	For 0-10V dimming
Live	Black	
Neutral	White	Purple + 0-10Vdc+
Ground	Green	Grey - Dc -



3 Screw backplate in junction box with screw 2x 8-32 machine screws (not included)

Make sure to install the backplate the side where the strain relief will meet the cable

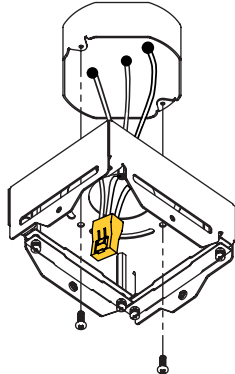




Etat-des-Lieux 2C


Assembly instructions




- 10** Install support covers
Use 2x flat screw provided per support box



- 11** 11.1 Make connections with dominos and flat cables in canopy feed
11.2 Clip white connectors together.

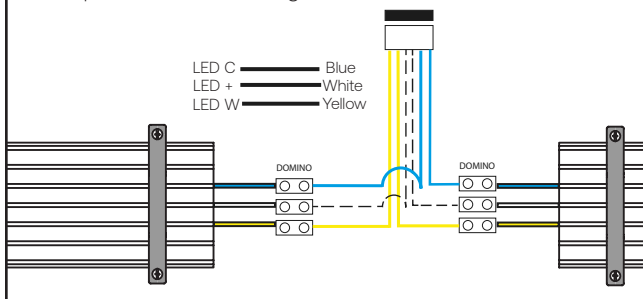

- 12** 12.1 Install canopy cover by sliding up and curving slightly the flat cable to pass the cover.

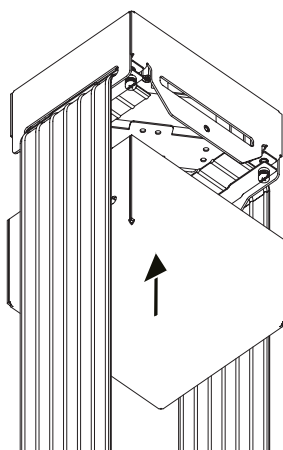

- 12.2 Screw in place with 2x flat screw provided.
(Lift cable out of the way for better access)

